
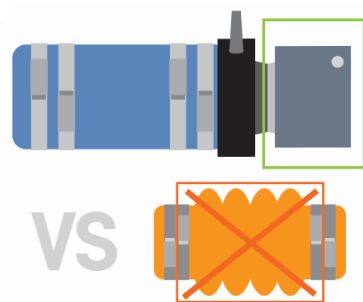



measurements in metric mm						
Model #	A	B	C	D	E	F*
G-25mm	25mm	38-51	81	257	70	159
G-30MM	30mm	44-76	81	225	70	127
		90	97	225		
G-35MM	35mm	51-83	89	225	75	127
		90	102	225		
G-40MM	40mm	51-83	95	230	77	130
		90	102	230		
G-45MM	45mm	64-90	102	246	89	152
		95-102	114	246		
G-50MM	50mm	64-102	114	246	98	152
		108-114	127	246		
G-55MM	55mm	73-114	127	306	105	178
G-60MM	60mm	76-114	127	306	105	178
		127	140	306		
G-65MM	65mm	76-114	127	306	119	178
		127	140	306		
		90	152	306		
G-70MM	70mm	90-127	140	306	126	178
		140	152	306		
		152	165	306		
G-75MM	75mm	114-140	152	318	133	188
		152	165	368		
		168	178	368		
G-80MM	80mm	114-127	152	318	140	188
		152	165	368		
		168	178	368		
G-85MM	85mm	114-140	165	324	163	193
		152	165	375		
		168	178	375		
		178	203	375		
		203	229	375		
G-90MM	90mm	127-140	165	343	163	229
		152	165	394		
		168	178	394		
		178	191	394		
		203	224	394		
G-95MM	95mm	127-152	178	394	163	229
		168-178	203	394		
G-100MM	100mm	140	183	343	177	229
		152	183	394		
		168	183	445		
		178	191	445		
		203	216	445		
G-110MM	110mm	152-178	203	457	191	241
		203	229	457		
G-120MM	120mm	152-203	229	457	203	241
		254	279	457		
		305	324	457		
G-130mm	130mm	152-203	229	457	203	241
		254	279	457		
		305	324	457		

\* Minimum clearance between stern tube and coupling.  
If seal body is close to the stern tube, you must insure shaft is center to it.

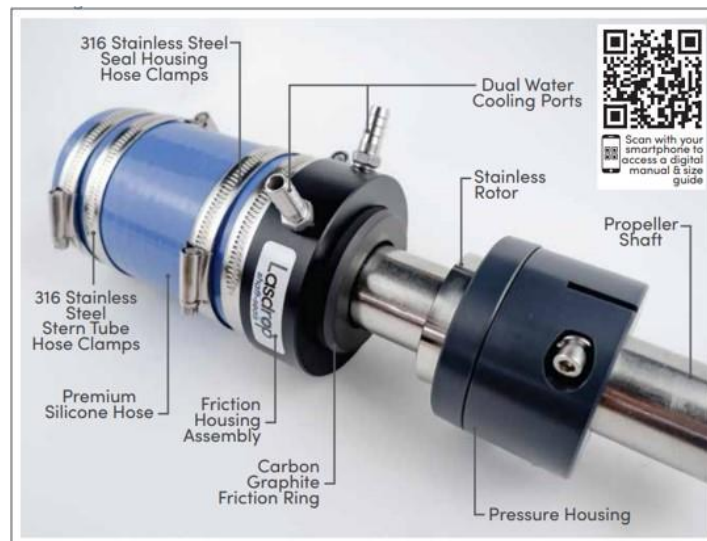


**Pressure Housing -vs- Bellows Hose**

Our Gen2 creates compression through the use of our innovative pressure housing, eliminating the needs for a bellows hose. This Pressure Housing offers a much longer life span when compared to a bellows, giving you less maintenance over the life of your seal

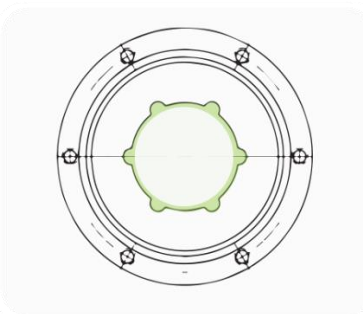

**Integrated Bearing Design**

Our integrated water lubricated bearing will allow the seal body to follow the shaft insuring proper face seal alignment. ( ALL Lasdrop bearing housings have tolerances within 0.001). The integrated bearing allows the seal body to self-align following the shaft

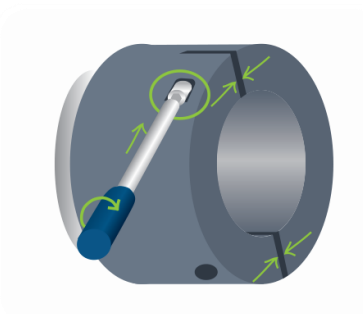

**Integrated Clamping System**

The Gen2 Pressure Housing secures to the shaft through a simple integrated clamping system. This eliminates the need for set screws – which can potentially damage the shaft & slide after their first use resulting in a less secure and stable seal.